


NIKOLAN -40C ()-LSLTx, 50/125, OM4, NKL-F-xxxM4I-00 -MG — 2/4/6/8/12/16/24/32/36/48

NIKOLAN -40C ()-LSLTx, 50/125, OM4,

NKL-F-xxxM4I-00C-MG

ISO/IEC 11801 OM4.

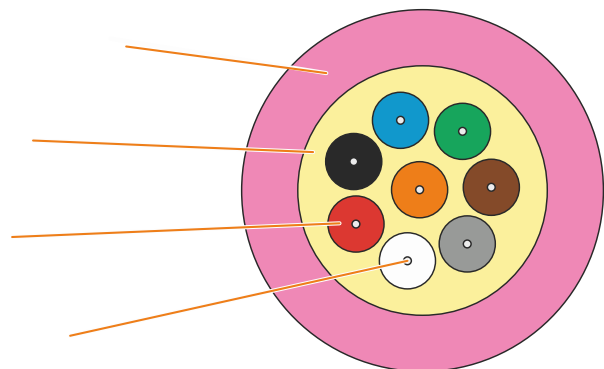

MM 50/125

NKL-F-008M4I-00C-MG

8

50/125,

OM4,

NIKOMAX NETWORK SOLUTIONS /// NIKOLAN NKL-F-008M4I-00C-MG 8 x MULTI MODE 50/125 ISO/IEC 11801 OM4 -40C Hr(A)-LSLTx DGYYMxxxM

NKL-F-xxxM4I -00C-MG											
	2	4	6	8	12	16	24	32	36	48	
	50/125 (Multi Mode)										
	ISO/IEC 11801 OM4										
	900 ± 25										
	(A)-LSLTx										
	4,0 ± 0,2	4,9 ± 0,2	5,2 ± 0,2	5,5 ± 0,2	6,2 ± 0,2	7,3 ± 0,2	8,5 ± 0,2	9,5 ± 0,2	9,5 ± 0,2	10,5 ± 0,2	
	10 Ø										
	15,0	18,0	23,0	27,0	36,0	55,0	65,0	70,0	74,0	110,0	
	100 /c										
	440				660				800		
	-20 +70 °C. -20 +70 °C.										
	450x400		600x400		650x400		700x600		800x600		900x600
	- 5 . 25 - NIKOMAX										

	850	1300
	2,3	0,6

*

	15	15	37,5	37,5
	2	100	100	100
	850	1300	850	1300
	1,0	1,0	0,5	0,5

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48

				3	
NKL-F-002M4I -00C-MG	2	MM 50/125	(A)-LSLTx	0,08	34
NKL-F-004M4I -00C-MG	4	MM 50/125	(A)-LSLTx	0,14	46
NKL-F-006M4I -00C-MG	6	MM 50/125	(A)-LSLTx	0,14	50
NKL-F-008M4I -00C-MG	8	MM 50/125	(A)-LSLTx	0,14	56
NKL-F-012M4I -00C-MG	12	MM 50/125	(A)-LSLTx	0,17	64
NKL-F-016M4I -00C-MG	16	MM 50/125	(A)-LSLTx	0,34	125
NKL-F-024M4I -00C-MG	24	MM 50/125	(A)-LSLTx	0,34	150
NKL-F-032M4I -00C-MG	32	MM 50/125	(A)-LSLTx	0,43	180
NKL-F-036M4I -00C-MG	36	MM 50/125	(A)-LSLTx	0,43	190
NKL-F-048M4I -00C-MG	48	MM 50/125	(A)-LSLTx	0,54	240