


NKL 5115C-OR - 500
 NKL 5110C-OR - 305
 U/UTP 25 , .5,
 , 0,50 , . / .., LSZH -40 ,

✓ ISO/IEC 11801,
 EN 50173 TIA/EIA-568
 ✓
 ✓

5
 100 /c.

NKL 511xC-OR 25 5
 (LSZH).
 500 305

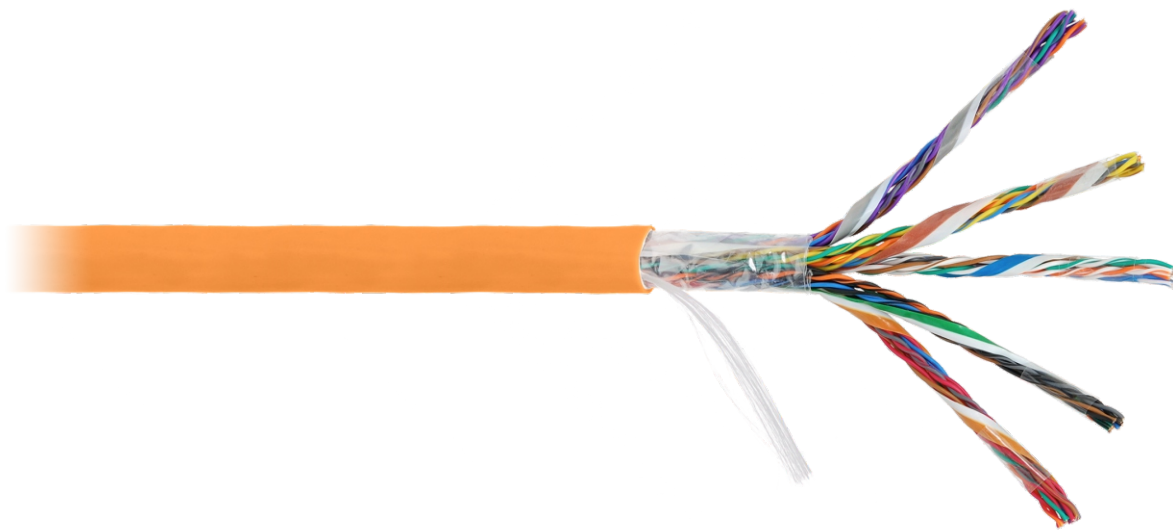

	NKL 511xC-OR		
	5		
	100		
	U/UTP		
	25		
	24 AWG (0,50 ± 0,01)		
	(HDPE)		
	0,24 ± 0,02		
	1,0 ± 0,05		
	LSZH		
	(A)-HFLTx		
	/		
	1 ± 0,05		
	13,8 ± 0,3		
	180,0 ± 1,0 /		
	15-		
	10-		
	100		
	100 ± 15		
(NVP)	0,69 ± 0,1		
	95 /		
	305	500	
	54429, ISO/IEC 11801, EN 50173 TIA/EIA-568		
	10BASE-T, 100BASE-TX, 100BASE-T4, 1000BASE-T, ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR-4, TR-16 Active, TR-16 Passive		
	-40 +70 °C.	0 +70 °C.	-40 +70 °C
(,)	570x500		
	1		

								3	
NKL 5110C-OR	5	25	UTP	/		305	-	-	-
NKL 5115C-OR	5	25	UTP	/		500	-	-	-