


NKL 6110C-OR - 500  
 NKL 6115C-OR - 305  
 U/UTP 50 , .5,  
 , 0,50 , . / , , LSZH -40 ,

✓ ISO/IEC 11801,  
 EN 50173 TIA/EIA-568  
 ✓  
 ✓

100 /c.

NKL NKL 611xC-OR 50 5  
 (LSZH).

500 305

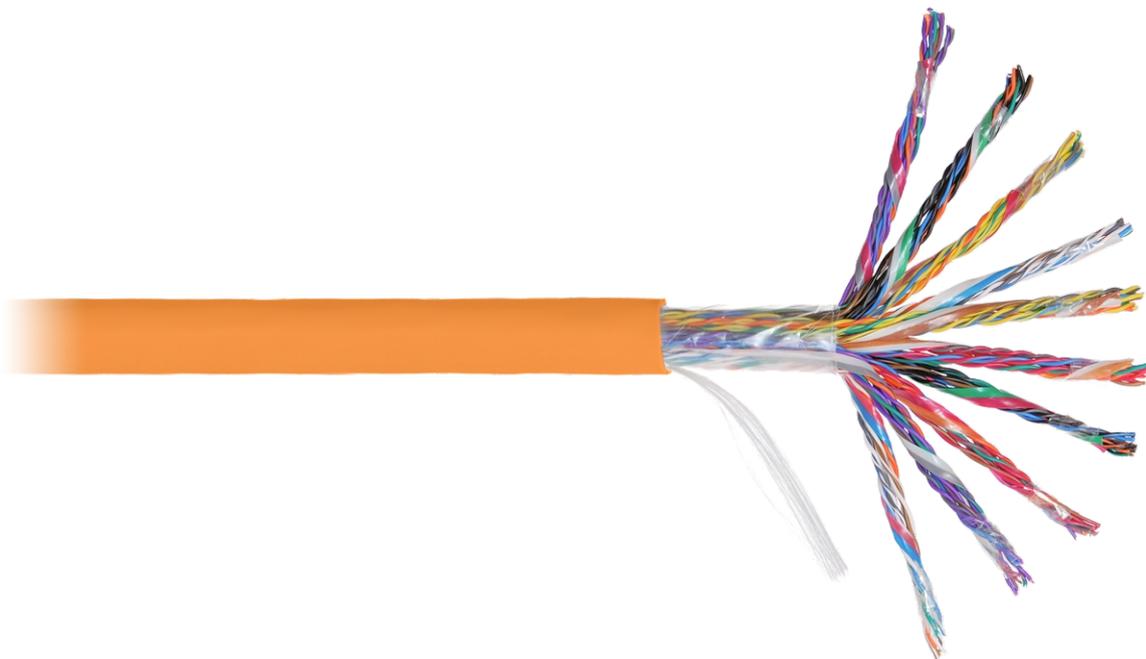

	NKL 611xC-OR	
	5	
	100	
	U/UTP	
	50	
	24 AWG (0,50 ± 0,01 )	
	(HDPE)	
	0,22 ± 0,02	
	0,9 ± 0,05	
	LSZH	
	(A)-HFLTx	
	/	
	0,1 ± 0,05	
	17,3 ± 0,3	
	229,0 ± 1,0 /	
	15-	
	10-	
	100	
	100 ± 15	
(NVP)	0,69 ± 0,1	
	95 /	
	305	500
	54429, ISO/IEC 11801, EN 50173 TIA/EIA-568	
	10BASE-T, 100BASE-TX, 100BASE-T4, 1000BASE-T, ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR-4, TR-16 Active, TR-16 Passive	
	-40 +70 °C.	0 +70 °C. -40 +70 °C
( , )	850x500	
	1	

NKL 6110C-OR	5	50	UTP	/		305	-	-
NKL 6115C-OR	5	50	UTP	/		500	0,361250	188,500

