


NIKOLAN - F-xxxM3I-00 -BK — 2/4/6/8/12/16/24/32/36/48

NIKOLAN - / 50/125 , OM2,  
( )-LSLTx,

NIKOLAN - F-xxxM3I-00C-BK /

ISO/IEC 11801 OMB.

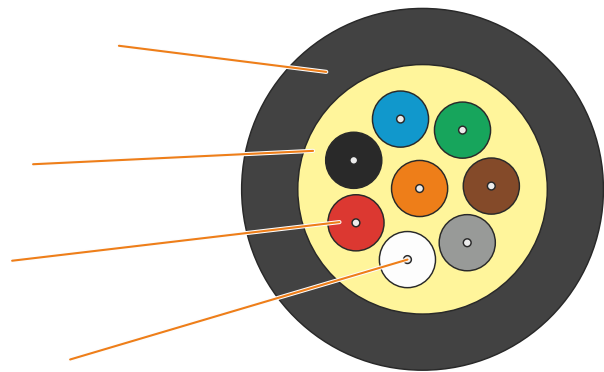

MM 50/125

NIKOLAN - F-008M3I-00C-BK  
8 / 50/125 , OMB,

NIKOMAX NETWORK SOLUTIONS /// NIKOLAN NKL-F-008M3I-00C-BK 8 x MULTI MODE 50/125 ISO/IEC 11801 OMB -40 Hr(A)-LSLTx  
DGYMxxxM

NKL-F-xxxM3I-OOC-BK											
	2	4	6	8	12	16	24	32	36	48	
	50/125 (Multi Mode)										
	ISO/IEC 11801 OM3										
	900 ± 25										
	(A)-LSLTx										
	4,0 ± 0,2	4,9 ± 0,2	5,2 ± 0,2	5,5 ± 0,2	6,2 ± 0,2	7,3 ± 0,2	8,5 ± 0,2	9,5 ± 0,2	9,5 ± 0,2	10,5 ± 0,2	
	10 Ø										
	15,0	18,0	23,0	27,0	36,0	55,0	65,0	70,0	74,0	110,0	
	440				660				800		
	100 /c										
	-40 +70 °C. 0 +70 °C. -40 +70 °C.										
	450x400	600x400			650x400	700x600		800x600		900x600	
	-5 .25 - NIKOMAX										

	850	1300
	2,3	0,6

	15	15	37,5	37,5
	2	100	100	100
	850	1300	850	1300
	1,0	1,0	0,5	0,5

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48

				3	
NKL-F-002M3I-OOC-BK	2	MM 50/125	(A)-LSLTx	0,08	34
NKL-F-004M3I-OOC-BK	4	MM 50/125	(A)-LSLTx	0,14	46
NKL-F-006M3I-OOC-BK	6	MM 50/125	(A)-LSLTx	0,14	50
NKL-F-008M3I-OOC-BK	8	MM 50/125	(A)-LSLTx	0,14	56
NKL-F-012M3I-OOC-BK	12	MM 50/125	(A)-LSLTx	0,17	64
NKL-F-016M3I-OOC-BK	16	MM 50/125	(A)-LSLTx	0,34	125
NKL-F-024M3I-OOC-BK	24	MM 50/125	(A)-LSLTx	0,34	150
NKL-F-032M3I-OOC-BK	32	MM 50/125	(A)-LSLTx	0,43	180
NKL-F-036M3I-OOC-BK	36	MM 50/125	(A)-LSLTx	0,43	190
NKL-F-048M3I-OOC-BK	48	MM 50/125	(A)-LSLTx	0,54	240