


	NMC-PL-PM10-10					
	10					
	UL94V-0					
	-40	+70 °C.	0	+50 °C.	-10	+60 °C
	1					
	- , 10 .					

	NMC-PL-GDT1-10					
	190-260					
	5					
	-40	+70 °C.	0	+50 °C.	-10	+60 °C
	1					
	- , 10 .					

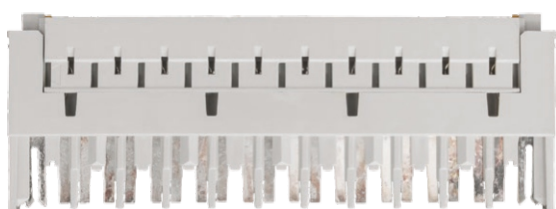

NMC-PL-PM10-10

, 10 , 10 .




NMC-PL-GDT1-10

, 10 .



NMC-PL-EC-10

, 10



NMC-PL-PM-COVER

NMC-PL-PM10-10	, 10	10 .	250 110 45	0,500	30 .	590x270x290	16,0
NMC-PL-GDT1-10		10 .	-	0,100	100 .	-	-
NMC-PL-PM-COVER		1 .	-	0,003	-	-	-
NMC-PL-EC-10		10 .	-	0,021	900 .	590x270x290	21