


NMC-CP110UD1-WT-10 - 1 , .5  
 NMC-CP110UD2-WT-10 - 2 , .5  
 NMC-CP110UD4-WT-10 - 4 , .5  
 110 NIKOMAX,  
 - 10




110- ( 110 - )  
 110  
 NIKOMAX 110  
 IDC

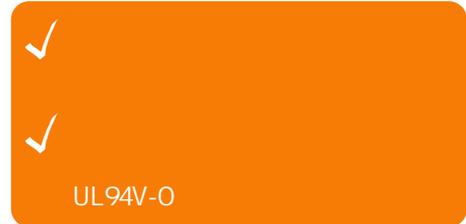

NMC-CP110UD1-WT-10



NMC-CP110UD2-WT-10

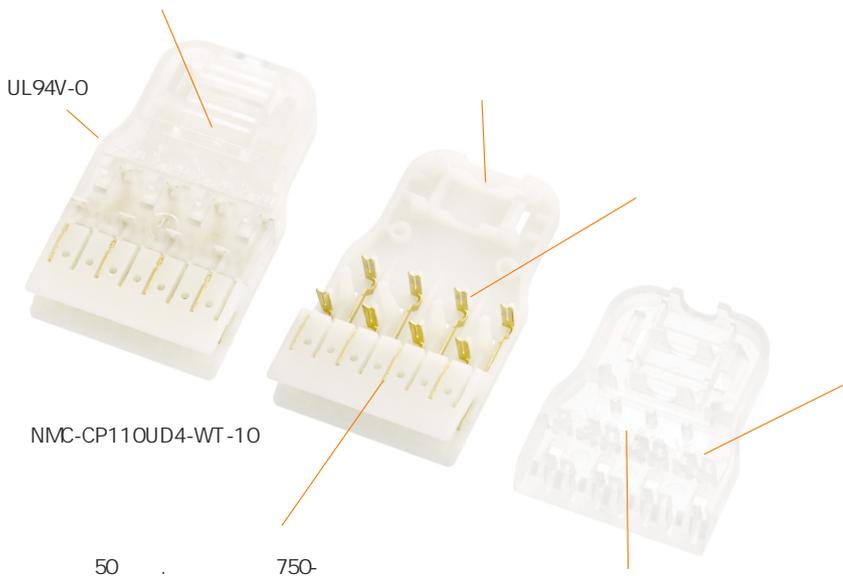

NMC-CP110UD4-WT-10

50

750

	NMC-CP110UD1-WT-10	NMC-CP110UD2-WT-10	NMC-CP110UD4-WT-10
	1	2	4
	5	5	5e
		100	
IDC		110	
		110	
		UL 94V-0	
		: ISO/IEC 11801, EN 50173 TIA/EIA-568	
		10BASE-T, 100BASE-TX, 100BASE-T4, 1000BASE-T, ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR-4, TR-16 Active, TR-16 Passive	
		-40 +70.	0 +70.
		1	
			10

			3	
NMC-CP110UD1-WT-10	1	10	0,000049	0,100
NMC-CP110UD2-WT-10	2	10	0,000520	0,060
NMC-CP110UD4-WT-10	4	10	0,000520	0,100

110 ( + ) 10 .