

NMC-CTN xxx - yy -RL-WT-100-K

100


NMC-CTN xxx - yy -RL-WT-100-K

~ 23°C

~ 50%

(2-3%

)

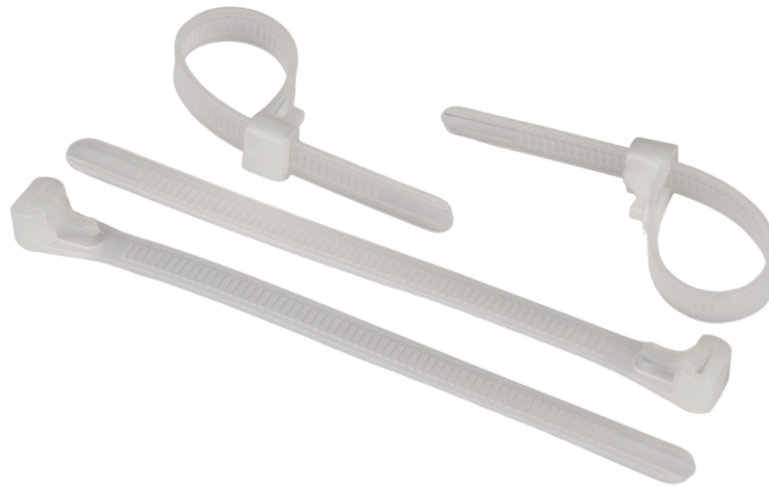

100

NMC-CTN xxx - yy -RL-WT-100-K					
66					
	125	200	250	300	370
	7,6				
	30	58	73	89	108
	222				
	0 +85 °C.		-40 +85 °C		
	1				

				3	
NMC-CTN125-76-RL-WT-100-K	125	7,6		0,000240	0,030
NMC-CTN200-76-RL-WT-100-K	200	7,6		0,000300	0,060
NMC-CTN250-76-RL-WT-100-K	250	7,6		0,000300	0,070
NMC-CTN300-76-RL-WT-100-K	300	7,6		0,000600	0,110
NMC-CTN370-76-RL-WT-100-K	370	7,6		0,000840	0,160

: xxx - (100 - 100 , 125 - 125 . . .); yy - (25 - 2,5 , 36 - 3,6 . . .)